



PN 10 - ART. E060


PN 16 - ART. E061

**SFIATO DOPPIO GALLEGGIANTE PN10-PN16****AIR RELEASE VALVE DOUBLE CHAMBER PN10-PN16****APPLICAZIONE:**

Fornitura, raccolta e distribuzione di acqua.

**APPLICATION:**

Supply, collection and distribution of water.

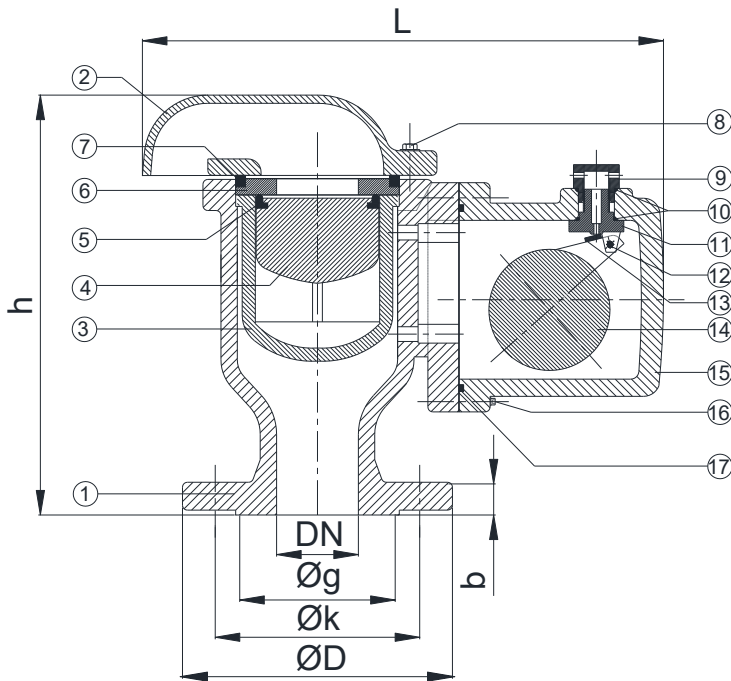

|              | COMPONENTI - PARTS                | MATERIALI - MATERIALS                   |
|--------------|-----------------------------------|---|
| 1            | CORPO<br>BODY                     | EN - GJS 400 - 15<br>EN - GJS 400 - 15  |
| 2/15         | COPERCHIO<br>COVER                | EN - GJS 400 - 15<br>EN - GJS 400 - 15  |
| 3            | GABBIA<br>CAGE                    | POLIAMMIDE 6<br>POLYAMID 6              |
| 4/14         | GALLEGGIANTE<br>FLOATER           | POLIPROPILENE<br>FOAMED POLYPROPYLENE   |
| 5/7<br>10/17 | O-RING<br>O-RING                  | EPDM<br>EPDM                            |
| 6            | DISCO<br>DISC                     | OTTONE<br>BRASS                         |
| 8            | VITE E RONDELLA<br>SCREW & WASHER | ACCIAIO 8.8<br>STEEL 8.8                |
| 9/11         | DEGASATORE<br>ORIFICE COVER       | ACC. INOX AISI 304<br>S. STEEL AISI 304 |
| 12           | PIN<br>PIN                        | ACC. INOX AISI 304<br>S. STEEL AISI 304 |
| 13           | TENUTA<br>SEALING FACE            | EPDM<br>EPDM                            |
| 16           | VITE<br>SCREW                     | ACCIAIO 8.8<br>STEEL 8.8                |

| ART.               | E060 |      |      |      |      |      |      | E061 |      |      |      |      |      |       |
|--------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|-------|
|                    | 50   | 65   | 80   | 100  | 125  | 150  | 200  | 50   | 65   | 80   | 100  | 125  | 150  | 200   |
| DN                 | 50   | 65   | 80   | 100  | 125  | 150  | 200  | 50   | 65   | 80   | 100  | 125  | 150  | 200   |
| L                  | 325  | 325  | 325  | 370  | 370  | 370  | 370  | 325  | 325  | 325  | 370  | 370  | 370  | 370   |
| h                  | 260  | 260  | 260  | 320  | 320  | 320  | 450  | 260  | 260  | 260  | 320  | 320  | 320  | 450   |
| øD                 | 165  | 185  | 200  | 220  | 250  | 285  | 340  | 165  | 185  | 200  | 220  | 250  | 285  | 340   |
| øk                 | 125  | 145  | 160  | 180  | 210  | 240  | 295  | 125  | 145  | 160  | 180  | 210  | 240  | 295   |
| øg                 | 99   | 118  | 132  | 156  | 184  | 211  | 266  | 99   | 118  | 132  | 156  | 184  | 211  | 266   |
| n x ød             | 4x19 | 4x19 | 8x19 | 8x19 | 8x19 | 8x23 | 8x23 | 4x19 | 4x19 | 8x19 | 8x19 | 8x19 | 8x23 | 12x23 |
| b                  | 19   | 19   | 19   | 19   | 19   | 19   | 20   | 19   | 19   | 19   | 19   | 19   | 19   | 20    |
| Viti / Bolt        | M16  | M16  | M16  | M16  | M16  | M20  | M20  | M16  | M16  | M16  | M16  | M16  | M20  | M20   |
| Peso / weight (kg) | 17   | 20   | 20.5 | 31   | 32   | 34   | 64   | 17   | 20   | 20.5 | 31   | 32   | 34   | 64    |

**RIVESTIMENTO - COATING**

Esterno/interno con polvere epossidica di colore blu RAL 5015 e spessore 250µm.

External/internal FBE coating process with epoxy resin powder of blue colour RAL 5015 and thickness of 250µm.